



FLAT DISPLAY TECHNOLOGY



This product is RoHS compliant

§ SPECIFICATION APPROVAL SHEET §

Fdt Tech Module No LP150L5IB~~x~~-FNR

Description: 15" Digital TFT-LCD Module

SPEC No.: SAS-1402002

Version: 0.0

Issue Date: February 10, 2014

※ This approval sheet contains 24 pages including the cover and appendix.

Customer:

Date: / / 14

APPROVED BY:

APPROVED BY:


CHECKED BY:

DESIGNED BY:



FLAT DISPLAY TECHNOLOGY

15" Digital TFT-LCD Module

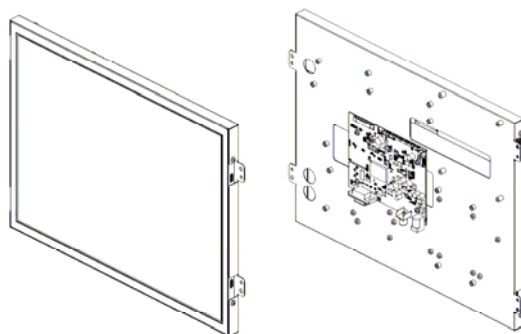

■ LP150L5IB~~x~~-FNR

1. General Description

1.1 Features

- 15" Digital TFT LCD
- Ultra Compact
- NTSC/PAL/SECAM Video Auto Switch
- Single Operation Voltage +12V
- CVBS / Analog RGB (PC Mode) Signal Input
- All Functions can be controlled by UART
- Support Touch Screen Function (Option)

1.2 Applications

- Portable product
- Industrial
- Hand-held
- Security
- Instrument Display
- Office Electronics

1.3 Application Precautions

Do not use the products herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.

- Aerospace equipment
- Communication equipment for trunk lines.
- Control equipment for the nuclear power industry.
- Medical equipment related to life support, etc.

The other application that demands high reliability and functionality should first contact a sales representative.

FLAT DISPLAY TECHNOLOGY

■ LP150L5IB~~x~~-FNR V0.0



2. Contents


Contents	Page
1. General Description.....	1
1.1 Features	1
1.2 Applications	1
1.3 Application Precautions	1
2. Contents.....	2-3
3. Block Diagram.....	4
3.1 Block Diagram	4
4. TFT-LCD Information.....	5
4.1 TFT-LCD Mechanical Specifications	5
4.2 TFT-LCD Optical Characteristics	5
5. Order Information.....	6-7
5.1 Unit (CVBS / PC)	6
5.2 Unit (CVBS / PC / 5W Touch)	7
6. Dimension Information.....	8-10
6.1 Unit (LP150L5IBY-FNR)	8
6.2 Unit (LP150L5IBV-FNR)	9
6.3 Unit (LP150L5IBU-FNR)	10
7. Pin Description.....	11-13
7.1 AUO LCD Panel I/O Terminals (Pitch 1.25mm 20Pin DF14H, Side Entry Type)	11
7.2 J104: Pin Assignment of UART (Pitch 1.25mm 4Pin, Top Entry Type)	11
7.3 J106B : Pin Assignment of Analog RGB Input (D-Sub 15Pin)	12
7.4 DC 101: Pin Assignment of Power Input (Inside Diameter:2.1 ϕ Outside Diameter:5.5 ϕ Side Entry Type)	12
7.5 RCA 101: Pin Assignment of Video Input (RCA JACK Yellow, Side Entry Type)	12
7.7 J404 : Pin Assignment of Touch USB (USBA-Female 2.0mm, Side Entry Type)(Option)	13
7.8 DB401 : Pin Assignment of Touch RS232 (D-SUB 9 FEMALE)(Option)	13
8. Absolute Maximum Ratings.....	14
8.1 Absolute Maximum Ratings	14
9. Recommended operating conditions.....	14
9.1 Electrical Characteristics	14
9.2 VGA Mode Characteristics	14
10. 5W Resistance Touch Panel Characteristics.....	15-17
10.1 Pin assignment	15
10.2 Electrical Performance	15
10.3 Optical Performance	15
10.4 Mechanical Performance	15
10.5 Durability Performance	15
10.6 Touch Screen Integration Design Guide	16

10.7 Mechanical Design Notice For Touch Panel	17
11. Operation Manual.....	18
11.1 Driver Board Manual	18
12. Packing List.....	19
13. Key Function by OSD.....	20-23
13.1 Menu Operation	20-22
13.2 Operations	23

Tentative

3. Block Diagram

3.1 Block Diagram

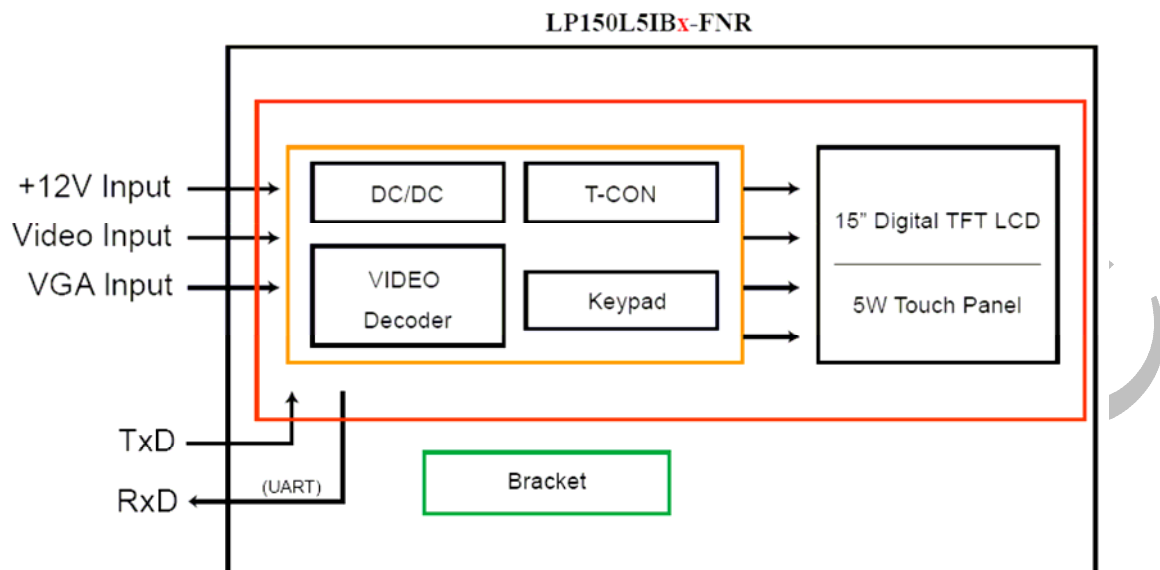

4. TFT-LCD Information

4.1 TFT-LCD Mechanical Specifications


Parameter	Specifications	Unit
Screen Size	15 (diagonal)	inch
Display Format	1024 x (R.G.B) x 768	dot
Active Area	304.128 (H) x 228.096 (V)	mm
Pixel Pitch	0.297 (H) x 0.297 (V)	mm
Pixel Arrangement	RGB vertical stripe	
Surface Treatment	Hard Coating, Anti-Glare	

4.2 TFT-LCD Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Left	70	80	---	deg	
		Right	70	80	---		
	Vertical	Top	50	70	---	deg	
		Bottom	50	70	---	deg	
Contrast Ratio	CR	At optimized Viewing angle	450	700	---	---	
Response time	Rise Fall	Tr	---	5	10	ms	
		Tf	---	11	16	ms	
Brightness	L		200	250	---	cd/m ²	
Brightness With TSP			160	200		cd/m ²	
White Chromaticity	x	$\theta = 0^\circ$	0.263	0.313	0.363		
	y	$\theta = 0^\circ$	0.279	0.329	0.379		
LED Life Time		25°C	50000	---	---	Hr	

5. Order Information

5.1 Unit (CVBS / PC)

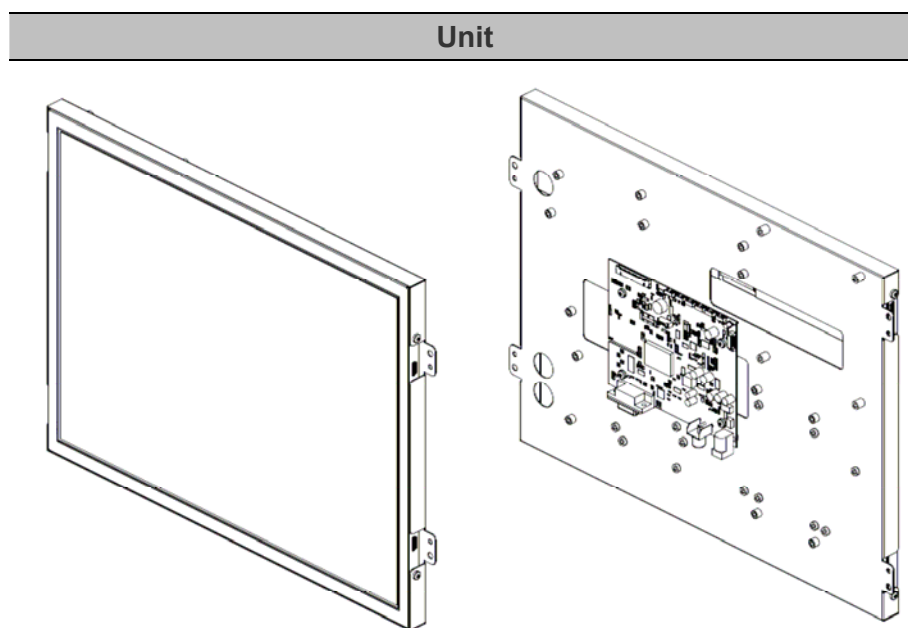


Parameter	LP150L5IBY-FBR	LP150L5IBY-FNR	Unit
CVBS	1	1	
VGA (D-Sub15 / 2.0mm 14Pin)	D-Sub15	D-Sub15	
AC to DC Adapter 12V/3A (LASTD12030-FDR)	⊙	-	
Power Cord Plug Type B for USA (LAACD18000-FDR)	⊙	-	
Video Cable (LAVDO18000-FDR)	⊙	-	
VGA Cable (LAVGA16000-FDR)	⊙	-	

FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



5.2 Unit (CVBS / PC / 5W Touch)

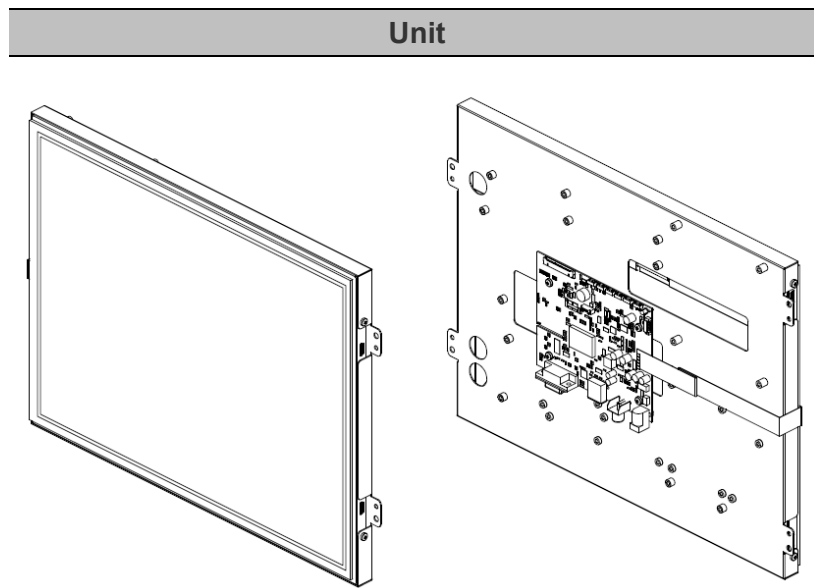

Parameter	LP150L5IBV-FBR	LP150 L5IBU -FBR	LP150 L5IBV -FNR	LP150 L5IBU -FNR	Unit
CVBS	1	1	1	1	
VGA (D-Sub15 / 2.0mm 14Pin)	D-Sub15	D-Sub15	D-Sub15	D-Sub15	
Touch Panel Type	5W Resistive	5W Resistive	5W Resistive	5W Resistive	
Touch Screen Interface	USB	RS232	USB	RS232	
AC to DC Adapter 12V/3A (LASTD12030-FDR)	⊙	⊙	-	-	
Power Cord Plug Type B for USA (LAACD18000-FDR)	⊙	⊙	-	-	
Video Cable (LAVDO18000-FDR)	⊙	⊙	-	-	
VGA Cable (LAVGA16000-FDR)	⊙	⊙			
USB Cable (LAUSB18000-FDR)	⊙	-	-	-	
RS-232 Cable (LARS218000-FDR)	-	⊙	-	-	
Touch Screen Driver CD Disk	⊙	⊙	⊙	⊙	


FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



6. Dimension Information

6.1 Unit (LP150L5IBY-FNR)

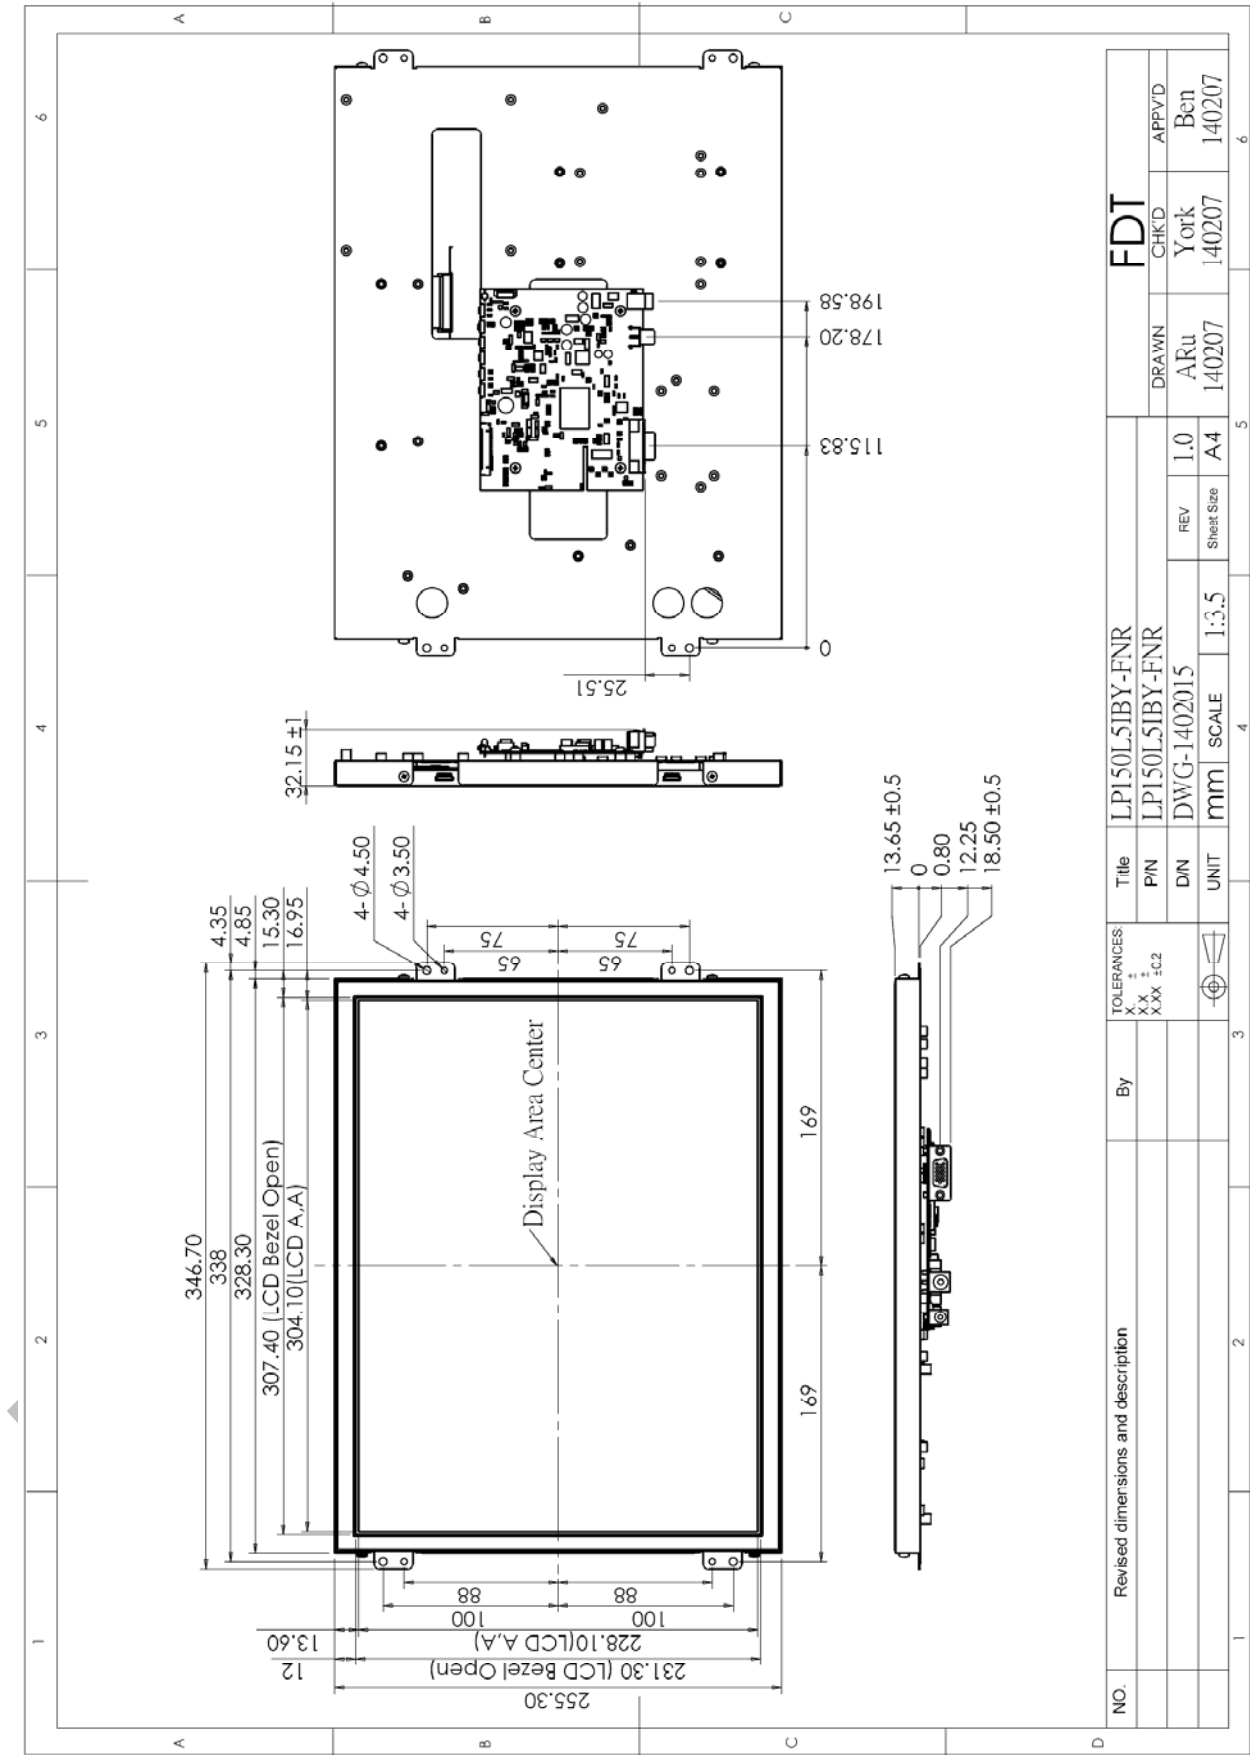


FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



6.2 Unit (LP150L5IBV-FNR)

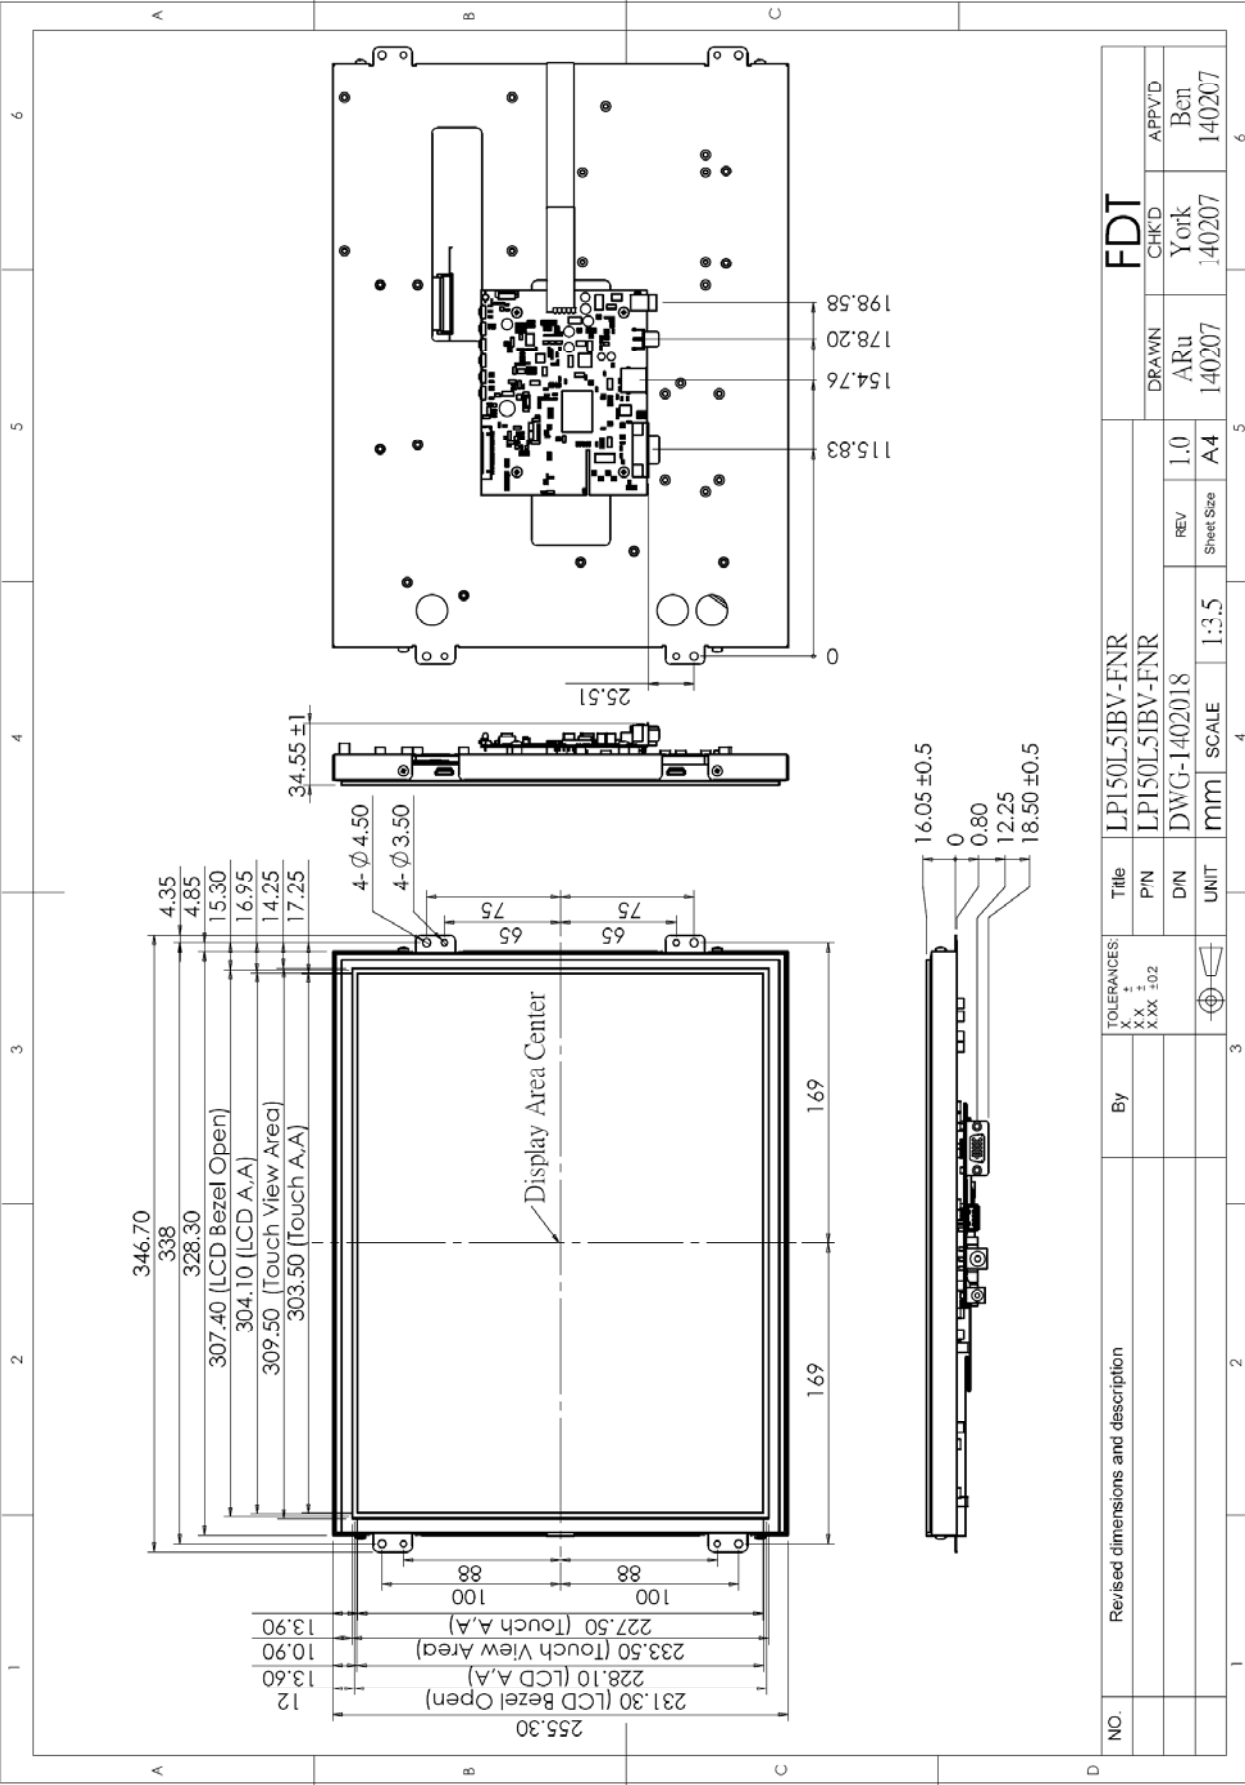


NO.	Revised dimensions and description	By	TOLERANCES: X ± XX ± X.XX ±0.2	LP150L5IBV-FNR				FDT							
				Title				REV	Sheet Size	DRAWN	CHK'D	APPV'D			
				P/N	LP150L5IBV-FNR										
				D/N	DWG-1402018										
				UNIT	SCALE	1:3.5									
															

FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



6.3 Unit (LP150L5IBU-FNR)

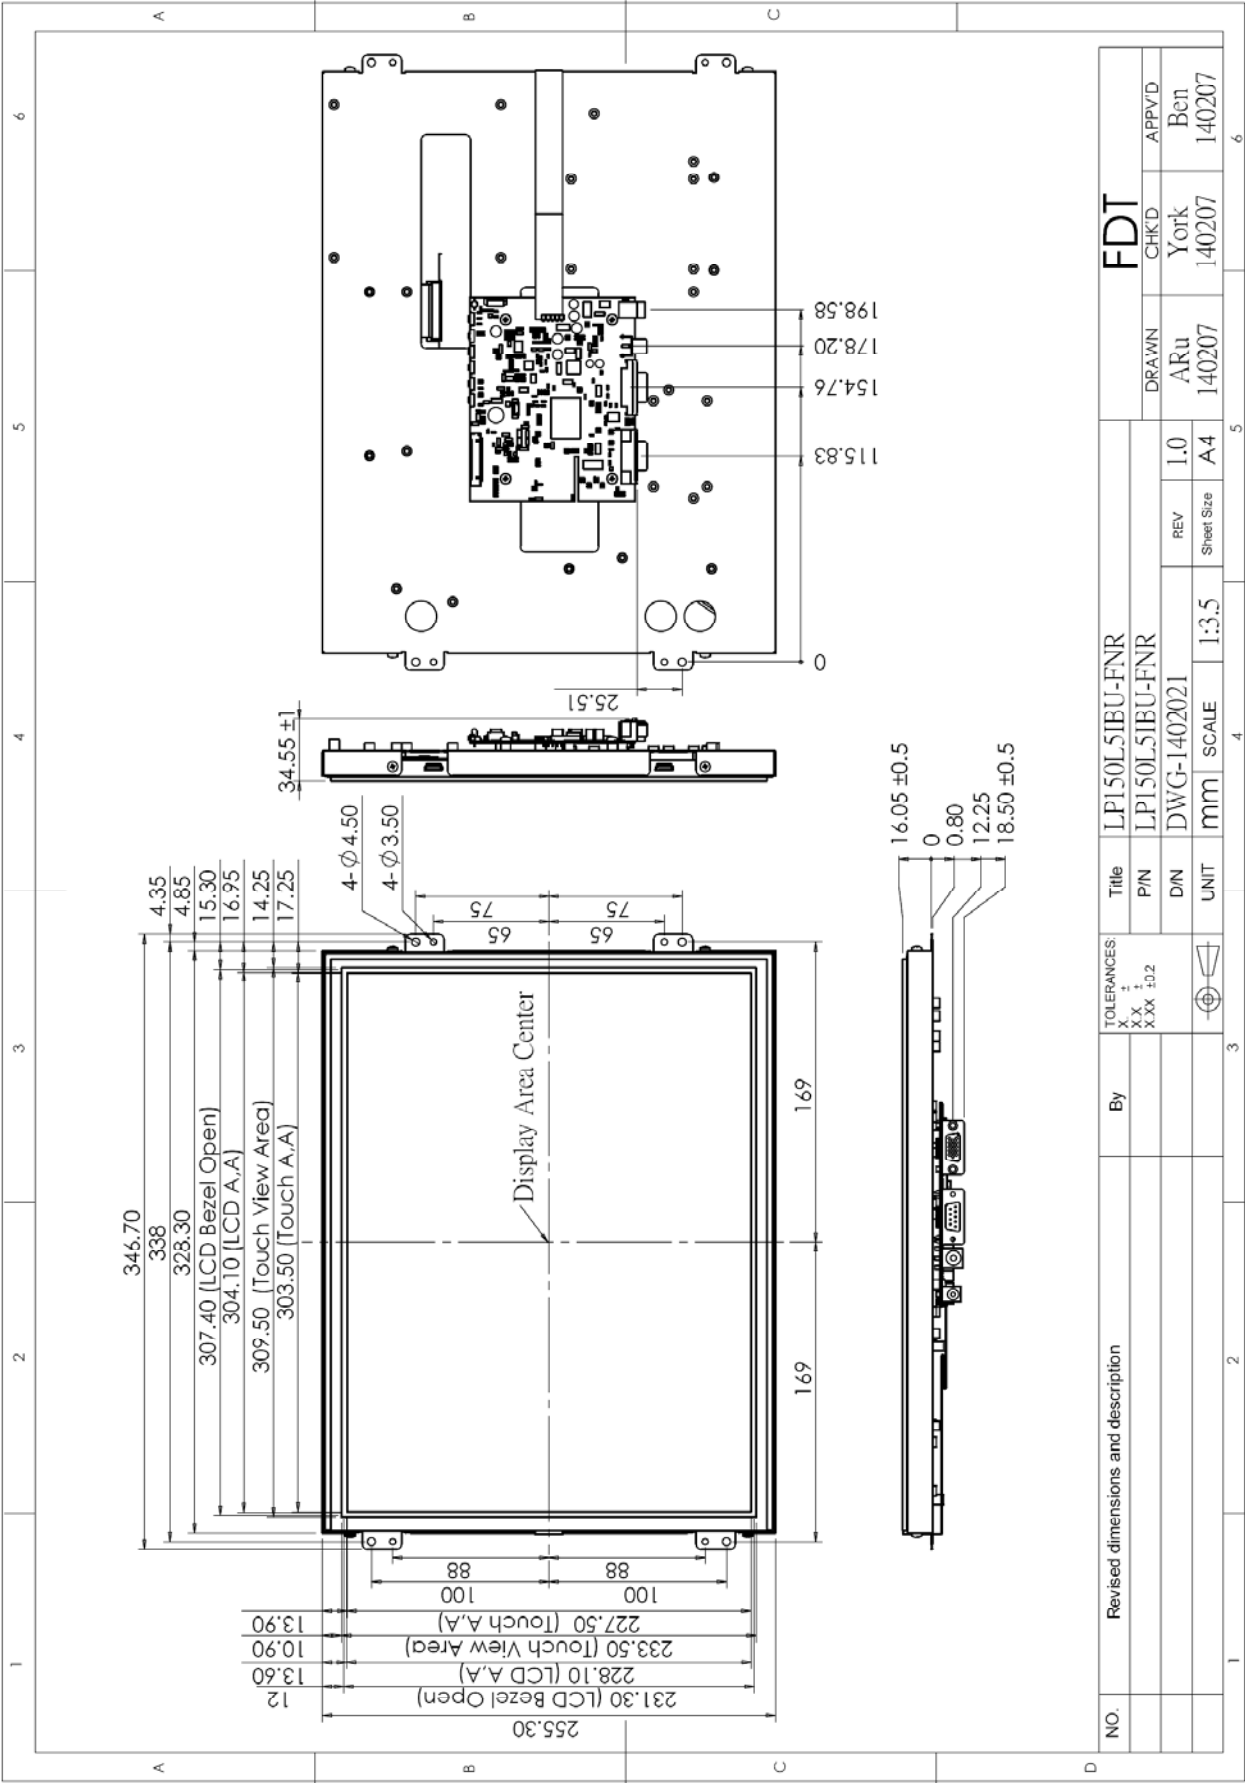

FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



7. Pin Description

7.1 LCD Panel I/O Terminals (Pitch 1.25mm 20Pin DF14H, Side Entry Type)

Pin No	Symbol	I/O	Description	Remark
1	VDD	I	Power Supply +3.3V(typical)	
2	VDD	I	Power Supply +3.3V(typical)	
3	GND	P	Ground	
4	LR/UD	I	Reverse Scan Control H or NC = Normal Mode. L = Horizontal/ Vertical Reverse Scan.	
5	RX0-	I	LVDS Differential Data Input Negative	
6	RX0+	I	LVDS Differential Data Input Positive	
7	GND	P	Ground	
8	RX1-	I	LVDS Differential Data Input Negative	
9	RX1+	I	LVDS Differential Data Input Positive	
10	GND	P	Ground	
11	RX2-	I	LVDS Differential Data Input Negative	
12	RX2+	I	LVDS Differential Data Input Positive	
13	GND	P	Ground	
14	RXCLK-	I	LVDS Differential Data Input Negative	
15	RXCLK+	I	LVDS Differential Data Input Positive	
16	GND	P	Ground	
17	RX3-	I	LVDS Differential Data Input Negative	
18	RX3+	I	LVDS Differential Data Input Positive	
19	GND	P	Ground	
20	SEL6/8	I	LVDS 6/8 bit select function control, High _ 6bit Input Mode. Low or NC _ 8bit Input Mode.	


7.2 J104: Pin Assignment of UART (Pitch 1.25mm 4Pin, Top Entry Type)

※ FDT Connector Part No.: MS24014 (STM) [Same as 53398-0471 (MOLEX)];

FDT Matching Connector Part No.: P24014 (STM) [Same as 51021-0400 (MOLEX)].

Pin No	Symbol	I/O	Description	Remark
1	TX	O	UART Transmission Data	
2	RX	I	UART Receive Data	
3	GND	-	Ground	
4	+3.3V	O	+3.3V Output Voltage	

Note: All Functions can be controlled by UART , About UART command list please contact FDT sales.

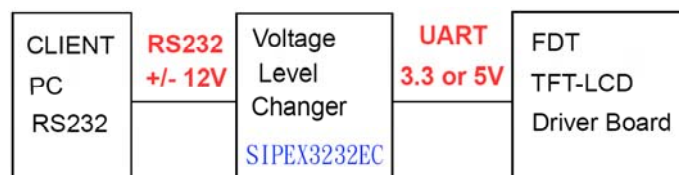


FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



7.3 J106B : Pin Assignment of Analog RGB Input (D-Sub 15Pin)

Pin No	Symbol	I/O	Description	Remark
1	RI+	I	Analog Red Signal	
2	GI+	I	Analog Green Signal	
3	BI+	I	Analog Blue Signal	
4	NC	-	No Connection	
5	GND	-	Ground	
6	AGND	-	Analog Ground	
7	AGND	-	Analog Ground	
8	AGND	-	Analog Ground	
9	NC	-	No Connection	
10	NC	-	No Connection	
11	NC	-	No Connection	
12	NC	-	No Connection	
13	HS_IN	I	TTL Horizontal sync	
14	VS_IN	I	TTL Vertical sync	
15	NC	-	No Connection	



7.4 DC 101: Pin Assignment of Power Input (Inside Diameter:2.1 ϕ Outside Diameter:5.5 ϕ Side Entry Type)


Pin No	Symbol	I/O	Description	Remark
1	VIN	I	+12V Input Voltage	
2	GND	-	Power Ground	

7.5 RCA 101: Pin Assignment of Video Input (RCA JACK Yellow, Side Entry Type)

Pin No	Symbol	I/O	Description	Remark
1	Video	I	Video Input	
2	AGND	-	Analog Ground	


7.7 J404 : Pin Assignment of Touch USB (USBA-Female, Side Entry Type)(Option)

Pin No	Symbol	I/O	Description	Remark
1	VBUS	-	USB VCC	
2	D-	-	DATA (-)	
3	D+	-	DATA (+)	
4	DGND	-	Digital Ground	



7.8 DB401 : Pin Assignment of Touch RS232 (D-SUB 9 FEMALE)(Option)

Pin No	Symbol	I/O	Description	Remark
1	NC	-	No Connection	
2	TXD	-	Transmit Data	
3	RXD	-	Receive Data	
4	NC	-	No Connection	
5	GND	-	Ground	
6	NC	-	No Connection	
7	NC	-	No Connection	
8	NC	-	No Connection	
9	NC	-	No Connection	



8. Absolute Maximum Ratings

8.1 Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Remark
Input Voltage	Vin	TBD	TBD	V	
Video Input Signal	Video in	0.5	2.0	Vp-p	@75Ω
Analog RGB Input Signal	Analog RGB in	0.5	2.0	Vp-p	@75Ω
Digital Input Signal	TTL	+0.3	+3.6	V	
Operating Temperature		-20	+70	°C	
Storage Temperature		-30	+70	°C	
Operating Temperature With TSP		-20	+70	°C	
Storage Temperature With TSP		-30	+70	°C	

9. Recommended operating conditions

9.1 Electrical Characteristics

Parameter	Symbol	I/O	Min	Typ	Max	Unit	Note
Input Voltage	Vin	I	TBD	+12	TBD	V	
Total Current	Iin (+12V)	I		755		mA	±15%
Power Consumption		I		9.06		W	@+12V
Output Voltage	VDD	O	+3.2	+3.3	+3.4	V	I=10mA
Video Input Signal	Video in	I		1.0		Vp-p	@75Ω
Analog RGB Input Signal	Analog RGB in	RGB I		0.7		Vp-p	@75Ω

9.2 VGA Mode Characteristics

Dots per inch	Hor.	Unit	Polarity	Ver.	Unit	Polarity	Note
640*480	31.469	KHz	Negative	59.941	Hz	Negative	
800*600	37.879	KHz	Positive	60.317	Hz	Positive	
1024*768	48.363	KHz	Negative	60.004	Hz	Negative	

10. 5W Resistance Touch Panel Characteristics

10.1 Pin assignment

Pin No	Symbol	Description	Remark
1	RT	Right & Top electrode	
2	RL	Right & Lower electrode	
3	SG	Signal Ground	
4	LT	Left & Top electrode	
5	LL	Left & Lower electrode	

10.2 Electrical Performance

Parameter	Symbol	Min	Typ	Max	Unit	Remark
Loop Resistance	X	20	-	500	Ω	
	Y	20	-	500	Ω	
Linearity		-	-	1.5	%	
Insulation Impedance		20	-	-	M Ω	DC 25V
Response Time		-	-	15	ms	

10.3 Optical Performance

Parameter	Specifications
Transparency	80% $\pm$ 5%
Haze	Antiglare: <15%

10.4 Mechanical Performance

Parameter	Specifications
Input Method	Finger or stylus pen
Operating Force	R8 Silicon Rubber, 60HS
Surface Hardness	$\geq$ 3H


10.5 Durability Performance

Parameter	Specifications
Knock Test	10,000,000 times

10.6 Touch Screen Integration Design Guide


Avoid the design that Front-case overlap and press on the active area of the touch-panel.


Give enough gap (over 0.5mm at compressed) between the front case and touch-panel to protect wrong operating.

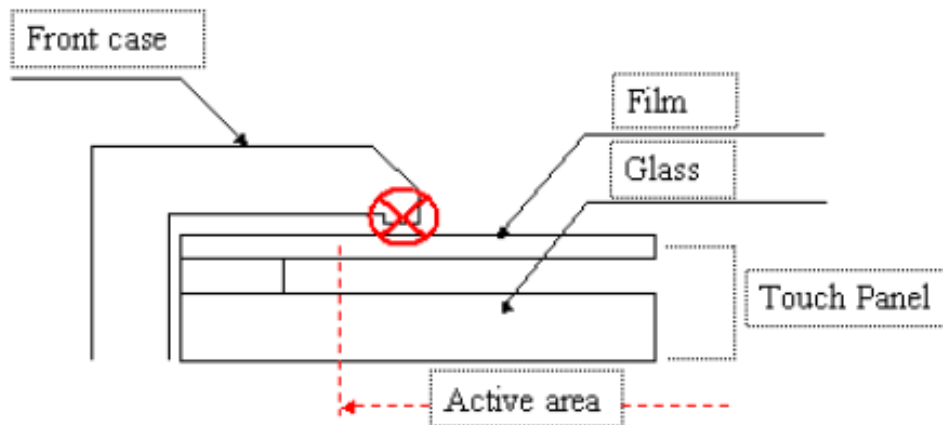

Use a buffer material (Gasket) between the touch-panel and front-case to protect damage and wrong operating.


Avoid the design that buffer material overlap and press on the inside of touch-panel viewing area.

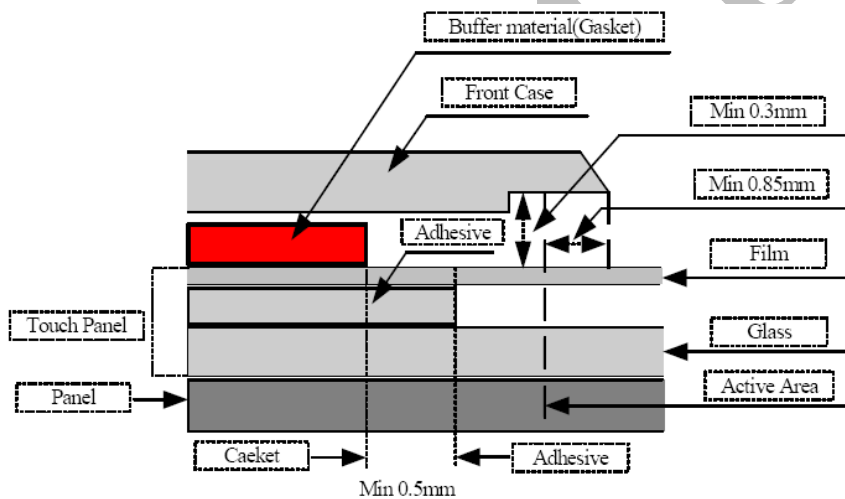

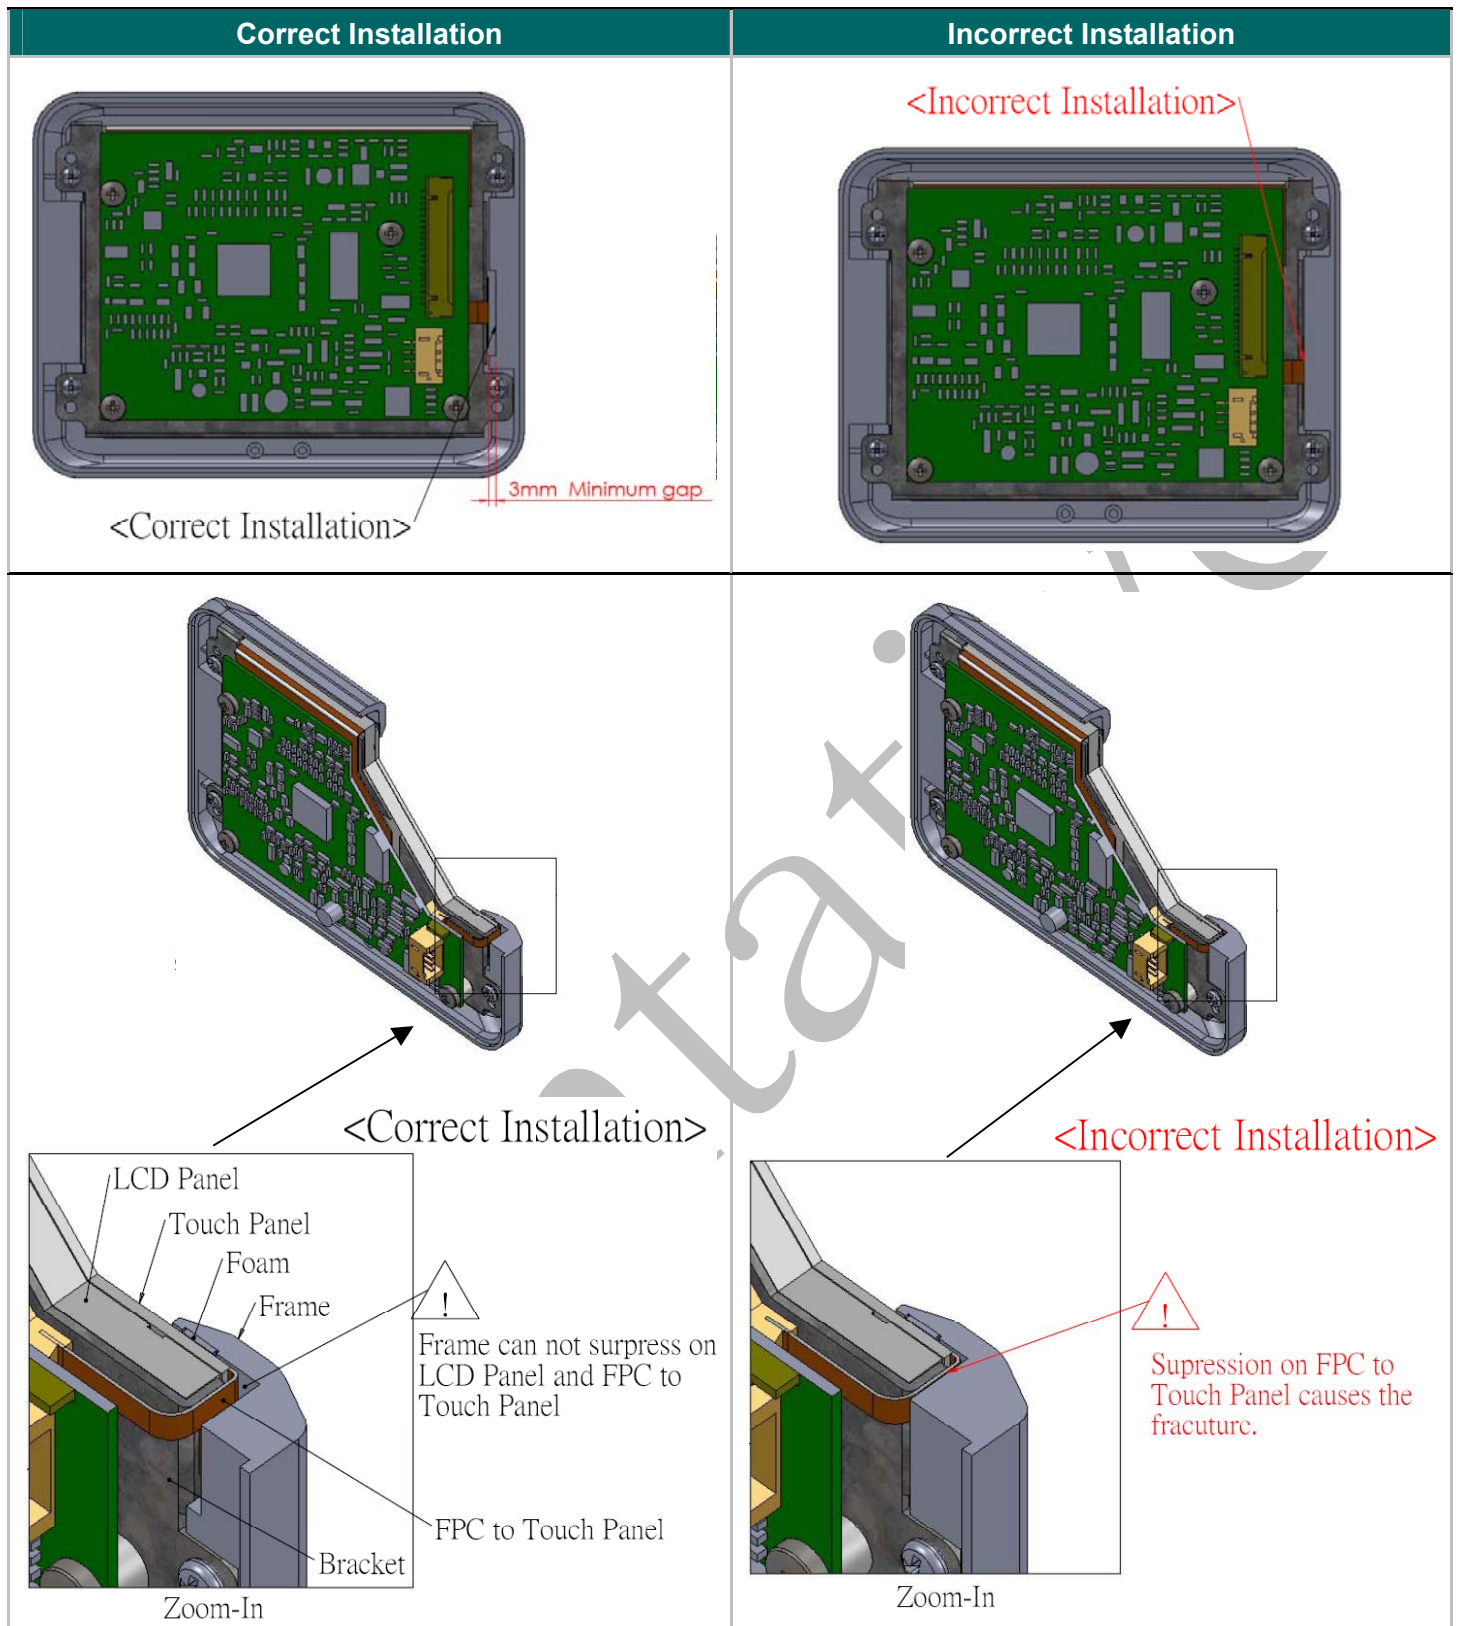

11. Operation manual

11.1 Driver Board Manual

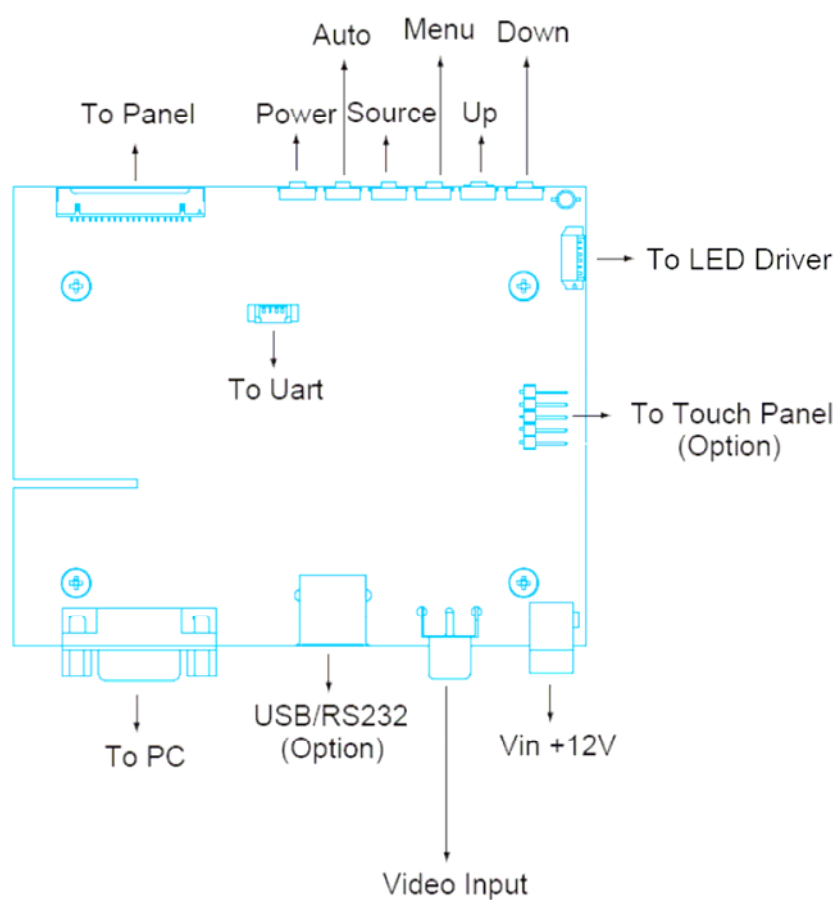

FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



12. Packing List

Before you begin installing the KIT, please make sure that the following materials have been shipped:



A. LASTD12030-FDR



B. LAACD18000-FDR



C. LAVDO18000-FDR



D. LAVGA16000-FDR



E. LAUSB18000-FDR



F. LARS218000-FDR



G.

- A. AC to DC Adapter (L:1500mm,100-240VAC 50-60Hz to +12VDC @ 3A)
- B. Power Cord (L:1800mm, Plug Type B for USA)
- C. Video Cable (L:1800mm)
- D. VGA Cable (L:1600mm)
- E. USB Cable (L:1800mm)
- F. RS-232 Cable (L:1800mm)
- G. Touch Screen Driver CD Disk / User Manual

If any of these items are missing or damaged, contact your distributor or sales representative immediately.



FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



13. Key Function by OSD

13.1 Menu Operation

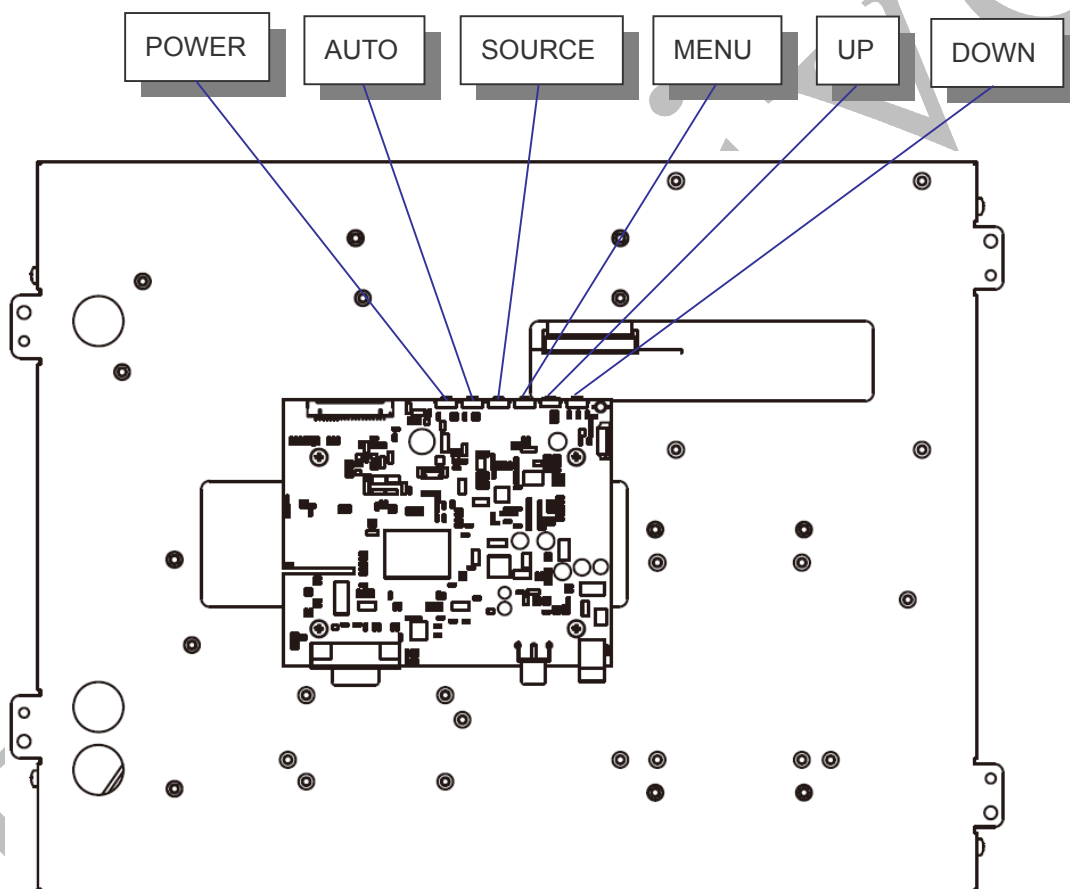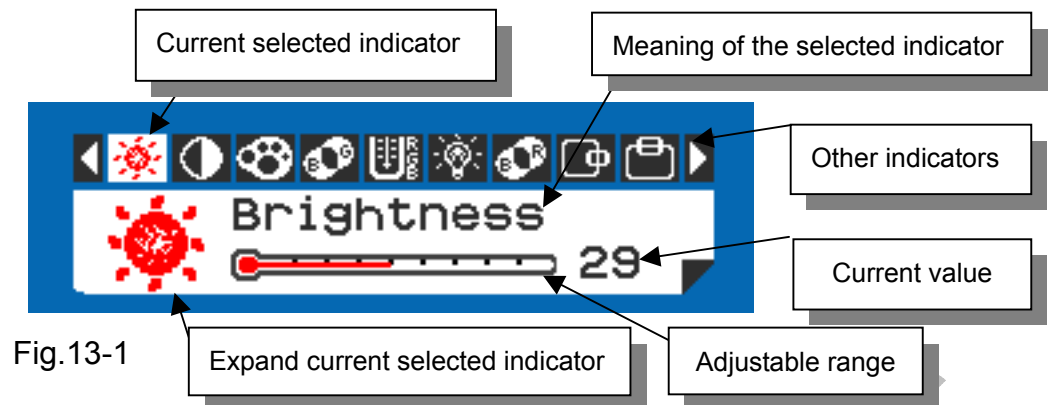

Operations of key board :

1. To navigate the menu, press [MENU]. (Fig.13-1)
2. The indicator lighting up in white color is the selected adjustment item.
3. To Next Item of the menu, press [MENU] again.
4. The operations below are only available when "Menu" is started.
5. Press [UP] / [DOWN] to adjust the value of the selected item.

Overview of the menu :

Firmware must be $\geq$ VER 0.26

Indicator	Meaning	Adjustable range	For	Remark
	Brightness	0 ~ 64	AV / VGA	Adjust-Bar
	Contrast	0 ~ 64	AV / VGA	Adjust-Bar
	Color	0 ~ 64	AV	Adjust-Bar
	Tint	0 ~ 32	AV	Adjust-Bar
	Sharpness	0 ~ 16	AV	Adjust-Bar
	Dimmer	0 ~ 9	AV / VGA	
	Color Tone	Normal / Warm / Cool	AV / VGA	
	H-Position	-25 ~ +25	AV / VGA	Balance-Bar
	V-Position	-10 ~ +10	AV / VGA	Balance-Bar
	Auto		VGA	
	Scan	Over Scan / Under Scan	AV	
	Information		AV / VGA	Fig.13-2
	Setup		AV / VGA	Fig.13-3
	Factory Set		AV / VGA	
	Exit		AV / VGA	

Fig.13-2

INFORMATION	
Video Source	AV1
Video System	NTSC
H-Freq	15.7KHz
V-Freq	60Hz
Program Ver	0.26
Command Ver	0.24
Graphic Ver	0.13

FLAT DISPLAY TECHNOLOGY

■ LP150L5IBx-FNR V0.0



Setup Menu :



Fig.13-3

Indicator	Meaning	Adjustable range	Function	Remark
	Show Status	ON / OFF	Show signal status.	ON: Show OFF: Hidden
	Blue Screen	ON / OFF	If loss signal will put on the blue or black screen.	ON: Blue OFF: Black
	Auto Power On	ON / OFF	Power input module will be auto turn on.	ON: Auto OFF: Manual
	Auto Saving	OFF / 3s / 5s / 15s / 30s	If signal lost over setting times will be power off.	ON: Auto OFF: Normal
	Detect Source	ON / OFF	Auto detection which source is existence and change.	ON: Auto OFF: Normal
	Return			

Note : VGA only type don't have Detect Source function.

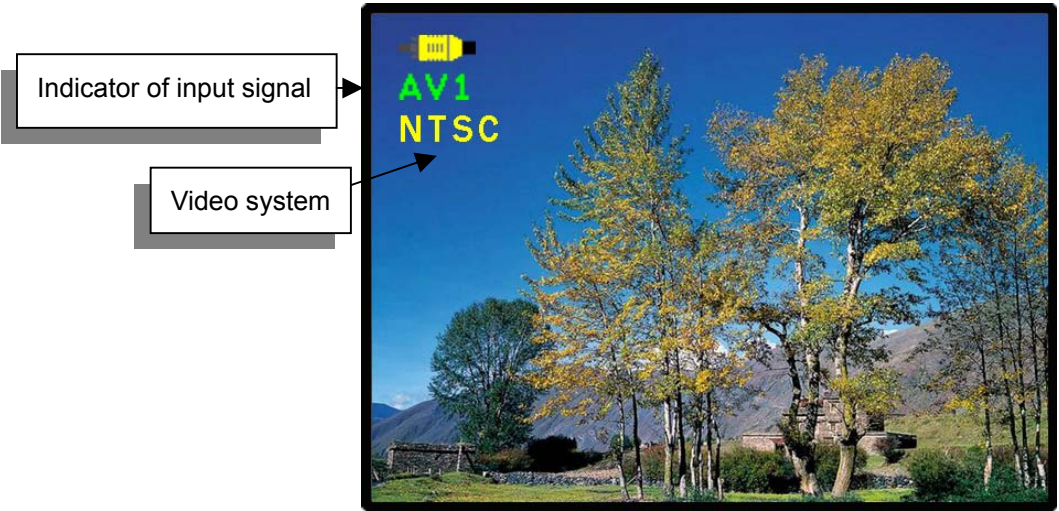


Fig.13-4

[Power] : Monitor power on / off
[Source] : Input signal switch

Overview of input signals :

Indicator	Input signal	Interface	Video system
	AV1	Composite	NTSC / PAL / SECAM
	VGA	Analog RGB	640x480_60 / 800x600_60 / 1024x768_60